




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61B 18/14	A1	(11) International Publication Number: WO 00/33753 (43) International Publication Date: 15 June 2000 (15.06.00)
<p>(21) International Application Number: PCT/US99/29209</p> <p>(22) International Filing Date: 9 December 1999 (09.12.99)</p> <p>(30) Priority Data: 09/210,219 11 December 1998 (11.12.98) US</p> <p>(71) Applicant: ETHICON, INC. [US/US]; U.S. Route 22 West, Somerville, NJ 08876 (US).</p> <p>(72) Inventors: TOM, Curtis, Peter; 257 Walnut Springs Court, West Chester, PA 19380 (US). REGULA, Donald, W.; 9 Ridgeview Drive, Belle Mead, NJ 08502 (US).</p> <p>(74) Agents: CIAMPORCERO, Audley, A., Jr. et al.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: CABLE FOR BIPOLAR ELECTRO-SURGICAL INSTRUMENT

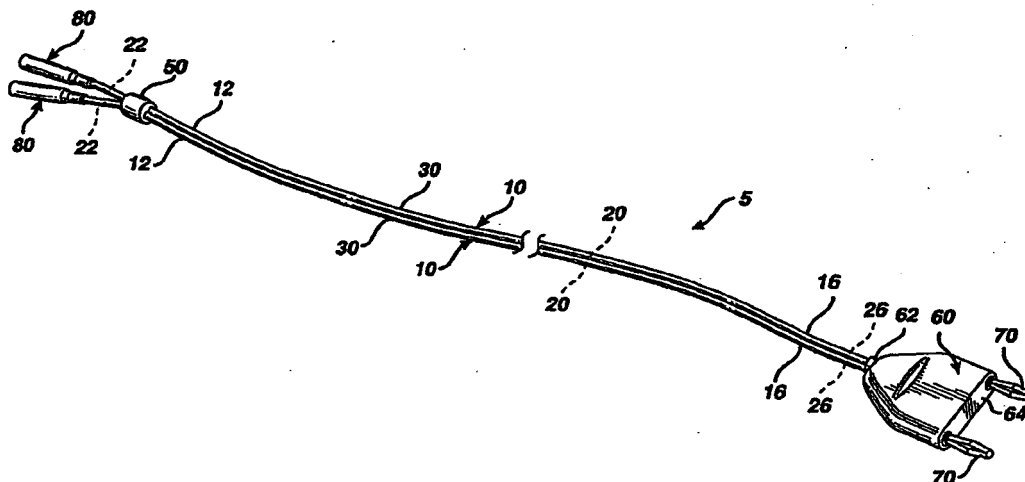

(57) Abstract

An electrical connecting cable for bipolar electrosurgical scissors. The cable (5) has a pair of insulated parallel conductors (10) having insulating coatings (30). The coatings are separably connected. A slidable grommet (50) is mounted to the cable. The conductors are partially separable from each other. A plug (60) is mounted to one end of the cable. Spring loaded connectors (80) are mounted to the other end of the cable.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

CABLE FOR BIPOLAR ELECTRO-SURGICAL INSTRUMENTTechnical Field

5

The field of art to which this invention relates is bipolar electrosurgical instruments, more particularly, cables for use with bipolar electrosurgical instruments.

10

Background of the Invention

15

20

Electrosurgical instruments are well known in the surgical arts. These instruments utilize radio frequency energy provided by a generator to power electrosurgical instruments having various configurations, e.g., pencils, probes, electrosurgical scissors, electrosurgical forceps, etc. The instruments, when in contact with tissue, allow for the passage of a high frequency current along a pathway from an active electrode, through tissue, and then to a ground or return electrode. The current flow allows the surgeon to cut or coagulate tissue by varying parameters such as power, contact time, wave form, frequency, etc.

25

30

There are two types of electrosurgical systems that are commonly used: monopolar systems and bipolar systems. The monopolar systems use an instrument with a single active electrode. A grounding pad having a substantially large surface area is mounted to the patient's body to provide a return path back to the generator. In a

- 2 -

monopolar system, current will flow from the active electrode on the instrument, to the tissue site, and then through the patient's body to the grounding pad. In contrast, bipolar systems typically utilize an instrument having both an active electrode and a return electrode mounted to the instrument. A patient grounding pad with its attendant disadvantages is not required. The current path in a bipolar system is from the active electrode, through the tissue site, and then back to the return electrode. The current path is much more localized in a bipolar system when compared to a monopolar system.

An electrosurgical system will typically consist of an electrosurgical generator, an electrosurgical probe or instrument, and a connecting cable. Conventional electrosurgical cables must provide conductors having sufficient size to safely conduct the electrosurgical power produced by the generator. The cables must be flexible and compact and must have sufficient electrical insulation. The cables must have connectors on both ends for electrically connecting the generator to the instrument. Since there is a fundamental difference in the operation of bipolar and monopolar electrosurgical instruments, it is an important safety consideration to prevent bipolar instruments from being inadvertently connected to monopolar electrosurgical generators. In addition, bipolar instruments typically have two electrical connectors while monopolar instruments only require one connector, i.e., the grounding pad is connected separately to the generator. Bipolar

- 3 -

instruments must be designed so that the additional electrical connector and cable does not impede the surgeon when using the bipolar instrument in a surgical procedure.

5 Cables known in this art may be made from conventional co-axial cable or conventional "zip" cable. The cables typically have banana plug connectors mounted on one or both ends. One end of a cable is connected to an electrosurgical generator, while the other end of the
10 cable is connected to an electrosurgical instrument. The cables may also have specially configured plugs on the generator end so that the cable can be used with only specific types of generators, for example, for use only with bipolar generators.

15 Although conventional bipolar cables perform adequately, there are several problems attendant with their use, including adjustability of cable length and secure mounting to terminal posts. In addition, when using
20 a bipolar instrument such as bipolar scissors which have electrodes that are moveable with respect to each other, conventional bipolar cables may be deficient since they do not allow for such movement.

25 Accordingly, there is a need in this art for improved bipolar cables, and for bipolar cables that can be used with bipolar instruments having moveable electrodes such as bipolar electrosurgical scissors.

30

- 4 -

Summary of the Invention

Therefore, it is an object of the present invention to provide a bipolar cable for bipolar electrosurgical instruments having a pair of conductors that are separable along the length of the cable, and wherein the length of the separated section is adjustable.

It is a further object of the present invention to provide a bipolar cable having connectors that adjust to securely mount to variously sized connector terminal posts.

It is yet a further object of the present invention to provide a novel cable for use with bipolar instruments that have moveable electrodes, such as bipolar electrosurgical scissors.

Accordingly, a bipolar cable for bipolar electrosurgical instruments is disclosed. The cable has a distal end and a proximal end and a length. The bipolar cable has a pair of parallel insulated electrical conductors consisting of electrically conductive wires having electrically insulating coatings. Each conductor has a distal end and a proximal end. The conductors are mounted parallel to each other by connecting the insulative coatings to each other along the length of the conductors. The conductors may be separated from each other along a section of the length by pulling the distal ends of the conductors apart thereby separating the

- 5 -

insulating coatings apart. A slidable grommet member is mounted over the conductors. A spring loaded connector is mounted to the distal ends of each conductor in electrical contact with the wires. Optionally, a bipolar generator plug is mounted to the proximal ends of the conductors for engagement with a bipolar electrosurgical generator. The length of the separation of the conductors from each other may be changed by sliding the grommet along the conductors, thereby maintaining separated segments of the conductors together.

Yet another aspect of the present invention is the above described bipolar cable in combination with a bipolar electrosurgical instrument such as a bipolar scissors instrument having electrodes that are moveable with respect to each other.

Still yet another aspect of the present invention is a method of using the cable of the present invention with a bipolar surgical instrument having electrodes that are moveable with respect to each other.

These and other aspects and advantages of the present invention will become more apparent from the accompanying drawings and detailed description.

Brief Description of the Drawings

FIG. 1 is a perspective view of the bipolar cable of the present invention.

- 6 -

FIG. 2 is a partial perspective view of the cable of FIG. 1 illustrating the adjustability of the length of the conductor separation by sliding a grommet along the conductors, after a segment of the cable has been separated by pulling apart.

FIG. 3 is a perspective view of the cable of the present invention showing the proximal plug end mounted in an electrosurgical generator and the distal spring loaded connectors mounted to the terminals of a bipolar electrosurgical scissors instrument.

FIG. 4 is a partial cross-sectional view taken along View Line 4-4 of FIG. 3, illustrating a spring loaded connector mounted to a terminal of the bipolar scissors.

FIG. 5 is a cross-sectional view taken along view line 5-5 of FIG. 4 illustrating the spring member with the spring loaded connector.

FIG. 6 is a cross-sectional view taken along View Line 6-6 of FIG. 3 showing the insulated conductors within the grommet.

Description of Preferred Embodiments

A cable 10 of the present invention is illustrated in FIGS. 1, 2, and 3. As seen in FIG. 1, the cable 5 has a pair of parallel elongated electrical conductors 10. The

- 7 -

conductors 10 have distal ends 12 and proximal ends 16. Conductors 10 are also seen to have interior electrically conductive wire members 20 having distal ends 22 and proximal ends 26. Wires 20 may be conventional single strand or multistrand wires or coaxial wires or cables. Referring also to FIG. 5, it is seen that the conductors 20 have electrically insulative coating 30 along their entire length. Insulative coatings 30 are made from conventional electrically insulative polymeric materials, mineral materials and the like and combinations and equivalents thereof. The insulative coatings 30 for each conductor are seen to be connected to each other at connection 35 along at least part of their length. The connection 35 is preferably designed so that the coatings 30 of conductors 10 are separable from each other along connection 35 by pulling the distal ends 12 of conductors 10 apart. Preferably, connection 35 is formed by co-extruding the coatings 30 onto wires 20. Alternatively, the insulative coatings can be mounted or connected to each other at connecting point 35 through conventional means such as melt fusing, adhesives, ultrasonic or heat welding, and the like. The coatings 30, however, should be separable from each other by minimal exertion of force on distal ends 12, while not separating from the wires 20.

Mounted to conductors 30 in a slidable fashion is the grommet member 50. Grommet member 50 is seen to be a substantially cylindrically shaped member having a central passage therethrough, although grommet 50 may have any shape including oval, rectangular, polygonal, square, and

- 8 -

the like and combinations thereof. The central passage is seen to have a configuration that has a cross-section substantially similar to the cross section of the cable 5 and conductors 10. Preferably, the passage way 55 will be dimensioned such that there is a slight resistance to movement or sliding over the conductors 10 such that the grommet 50, when moved to a position along the length of cable 10 and conductors 10, will remain in a fixed position. Grommet 50 is preferably made from the same types of electrically insulative materials used for the coatings 30. Mounted to the proximal end 16 of the conductors 10 is the generator plug member 60. Generator plug member 60 is seen to have distal end 60 for receiving the proximal end 16 of conductors 10 and proximal face 64. Extending proximally from proximal face 64 of the plug member 60 are the mounting plugs 70. Mounting plugs 70 are seen to be elongated conventional electrically conductive plug members that are electrically connected to wires 20. As seen in FIG. 3, the plugs 70 are inserted into receptacles in a conventional bipolar electrosurgical generator 200 (partially shown). Plug member 60 is designed to prevent the plug from being inserted into a conventional monopolar generator. If desired, plug member 60 may be replaced by conventional flying banana plugs mounted to the proximal ends 16 of cable conductors 10.

Mounted to the distal ends 22 of the conductors 20, as seen in FIGS. 1, 4, and 5 are the spring-loaded connector members 80. Members 80 are made from an

- 9 -

electrically conductive material, preferably metal. Spring-loaded connector members 80 are seen to have proximal end 82 having cavity 84 for receiving end 22 of wire 20. Connector member 80 is also seen to have a

5 distal cavity 90 adjacent to proximal end 83 having opening 92. Distal spring member 100 having prongs 105 separated by slots 106 is seen to be mounted in passage 90. Spring member 100 is substantially cylindrical in shape tapering inward along its length from distal end 101

10 to proximal end 102. The member 100 also has distal opening 103. In a resting configuration, the prongs 105 are situated relatively close to each other and are separated by slots 106. The prongs are moved apart from each other are upon the insertion of mounting post 160

15 into cavity 90 and exert a spring force upon the outer surface of post 160, thereby maintaining it within cavity 90. The spring member 100 is preferably made from an electrically conductive spring metal such that when the prongs 105 are separated they exert a biasing force upon

20 the prong 160. The spring member 100 is mounted in cavity 90 by a force fit or other conventional of mounting manner (e.g., soldering, brazing, etc.) such that the spring member 100 is in electrical contact with the member 80.

25 The spring loaded conductor 80 is seen to be covered by tubular member 110 having proximal end 112, distal end 114 and internal passage 116. Member 110 extends proximally past proximal end 82 onto conductor 10, and extends distally beyond the distal end 83 of member 80.

- 10 -

Tubular member 110 is preferably made from a flexible, expandable electrically insulating polymeric material. Wires 20 are made from conventional electrically conductive materials including copper, silver, aluminum and equivalents thereof. Insulative coating 130 may be made from conventional polymeric or mineral, electrically insulative materials and equivalents and combinations thereof.

A bipolar scissors instrument usable with cables 5 of the present invention is seen in FIG. 3. The scissors 120 is seen to have blade members 125. The blade members 125 are seen to have proximal finger grips 150 and distal tips 135. Extending from the distal end of the blade members 125 are the cutting blades 130. Blade members 125 are connected by insulated pivot screw member 140 such that the blade members 125 can pivot about the pivot screw member 140 with respect to each other. Blade members 125 are seen to have an insulative coating running from the finger grips 150 to just distal of the insulated screw 140. Extending proximally from each finger grip 150 are the electrically conductive electrode posts 160. Electrode posts 160 are insertable into cavities 90 of spring-loaded connectors 80. The electrode posts 160 are movable with respect to each other when the scissors are used and the blade members 125 rotate about pivot screw 140. This movement is permitted by the novel cable 5 of the present invention.

- 11 -

Referring to FIGS. 2 and 3, it will be appreciated by those skilled in the art that the degree of separation of the conductors 20 will depend on the characteristics of the instrument such as a scissors, as well as the characteristics of the hand of the user. The use of the cables 5 of the present invention allows the user to adjust the cable 5 to compensate for variations in scissor cutting stroke or electrode movement of the instrument, as well as the size of the hand of the surgeon. In addition, the spring-loaded connectors 80 compensate for wear or damage to the posts 160 and maintain the posts 160 both mechanically in cavity 90 and in electrical contact with members 80 when the posts move with respect to each other during a surgical procedure. It can be appreciated by those skilled in the art that electrode posts may vary in size from instrument to instrument, and that post dimensions of any given instrument may vary over time due to wearing or damage. In addition, the magnitude of the relative movement of electrodes on the instrument will vary from instrument to instrument. Furthermore, the cables 10 are useful for bipolar electrosurgical instruments that have moveable electrodes.

The connecting cables of the present invention allow for the connection to an electrosurgical generator of electrosurgical instruments having movable electrodes. The surgeon is able to compensate for differences in movement depending on the type of instrument utilized, for example, difference scissor types, and also compensate for individual differences in scissor stroke and user hand

- 12 -

size. In addition, the surgeon is assured that the cable will maintain electrical contact with the scissors electrode posts due to the spring loaded connectors mounted to the conductors.

5

Although this invention has been shown and described with respect to detailed embodiments thereof, it will be appreciated by those skilled in the art that various changes in form and detail thereof may be made without departing from the spirit and scope of the claimed invention.

10

- 13 -

WE CLAIM:

1. A bipolar cable for a bipolar surgical instrument, comprising:

5

a pair of parallel conductors, the conductors comprising an electrically conductive wire having an electrically insulating coating, each conductor having a length, a distal end and a proximal end, wherein the
10 insulating coatings are separably connected to each other along substantially the entire lengths of the conductors wherein said conductors may be separated from each other along a length by pulling the distal ends of the conductors apart;

15

a grommet member slidably mounted on the conductors, said grommet member having an interior passage for receiving the conductors;

20

a spring loaded electrical connector mounted to the distal end of each conductor;

25

a tubular electrically insulated member mounted over the spring-loaded connector; and,

30

a bipolar generator plug mounted to the proximal ends of the conductors for engagement with a bipolar electrosurgical generator said plug having a pair of electrically conductive mounting posts,

- 16 -

an elongated cylindrical frame having a proximal cavity for receiving a wire and a distal cavity for receiving an electrode post; and,

5

a tubular spring member mounted in the distal cavity for engaging the post.

10

6. The combination of claim 4 wherein the instrument comprises a bipolar electrosurgical scissors.

7. A method of using a bipolar electrosurgical device, the method comprising:

15

providing a bipolar surgical instrument comprising two electrically conductive posts wherein the instrument has electrodes that are moveable with respect to each other;

20

providing a cable comprising :

25

a pair of parallel conductors, the conductors comprising electrically conductive wire having an electrically insulating coating, each conductor having a length a distal end and a proximal end, wherein the insulating coatings are separably connected to each other along substantially the entire lengths of the conductors, wherein said conductors may be separated from each other

- 17 -

along a length by pulling the distal ends of the
conductors apart;

5 a grommet member slidably mounted on the conductors,
said grommet member having an interior passage for
receiving the conductors;

a spring loaded electrical connector mounted to the
distal end of each conductor;

10 a tubular electrically insulated member mounted over
the spring-loaded connector; and,

a bipolar generator plug mounted to the proximal ends
15 of the conductors for engagement with a bipolar
electrosurgical generator said plug having a pair of
electrically conductive mounting posts,

wherein the length of the separation of the
20 conductors may be changed by sliding the grommet along the
conductors;

separating the cable along a section of its length by
pulling the distal ends of the cable apart;

25 moving the grommet adjacent to the section of cable
that has been separated;

mounting the plug in an electrosurgical generator;

30

2/4

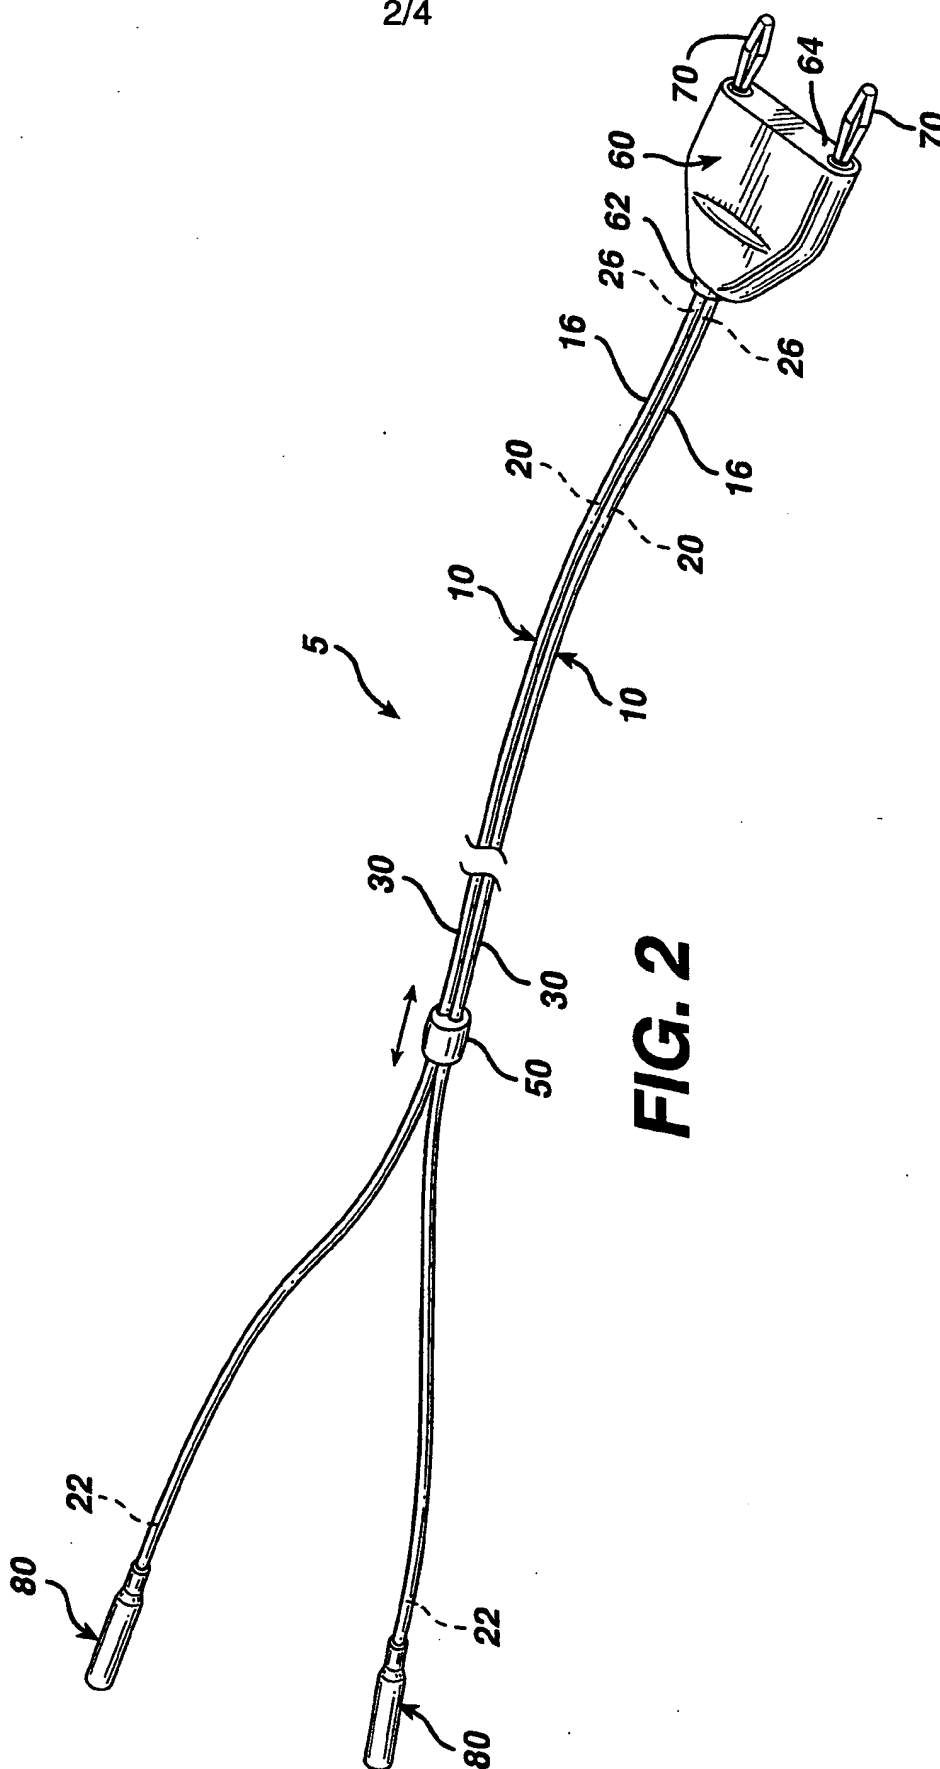


FIG. 2

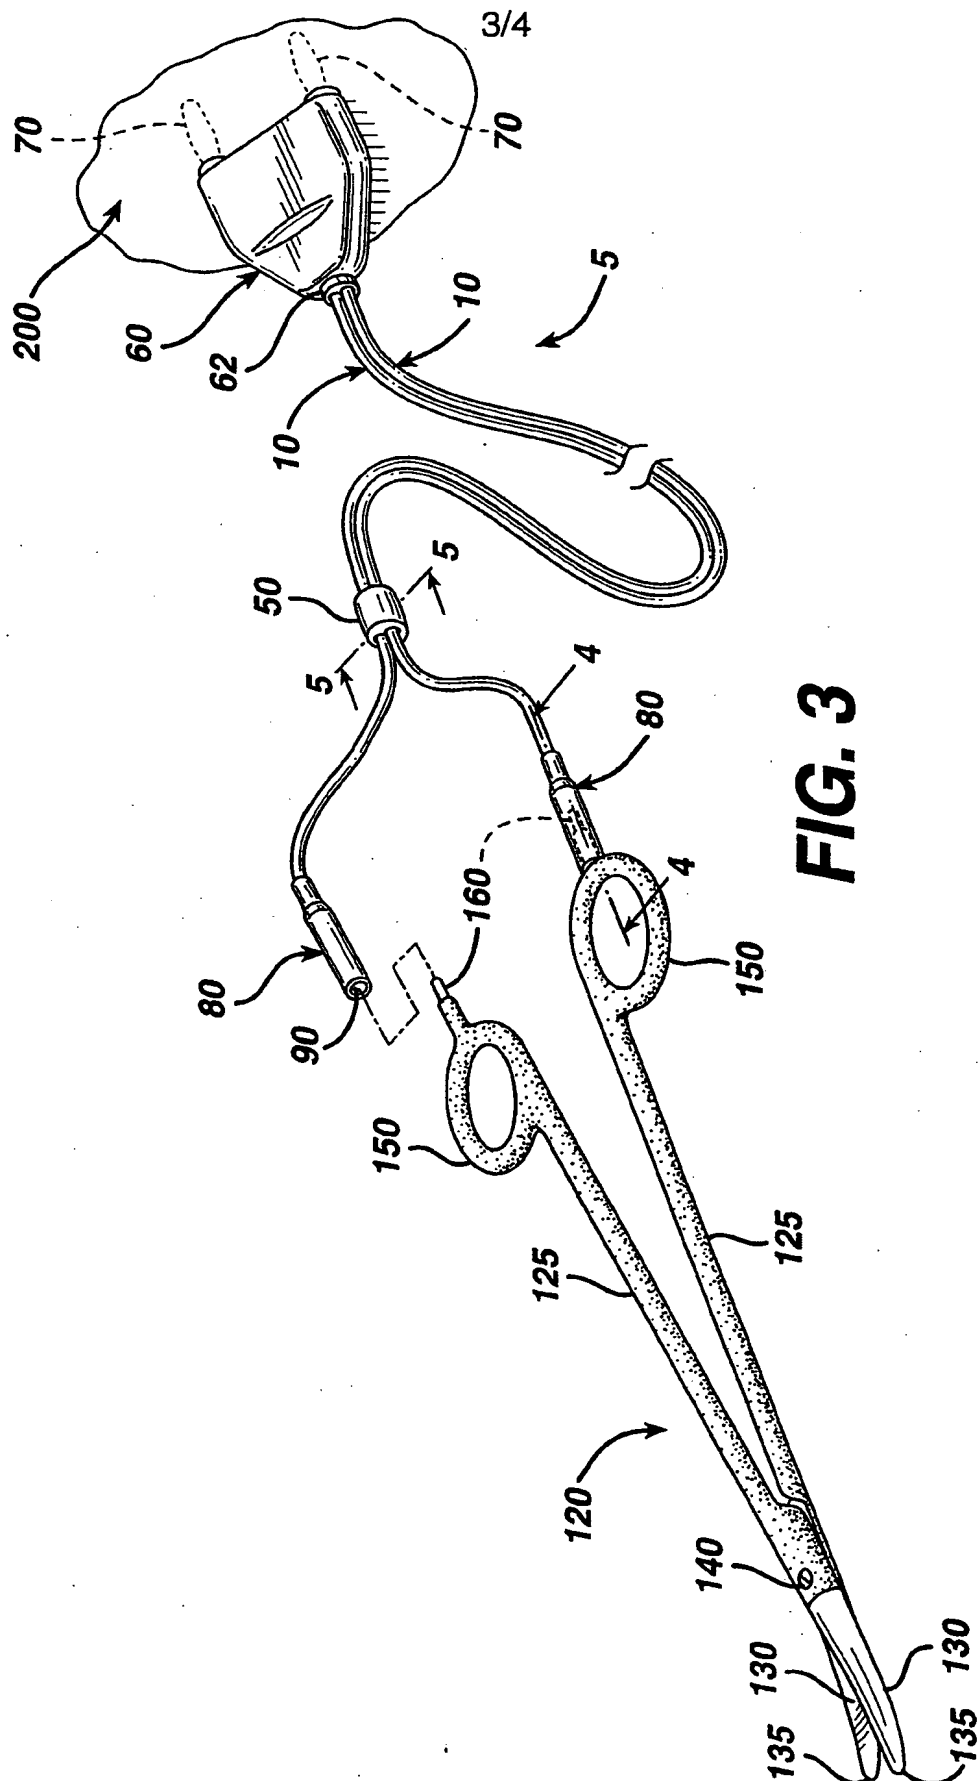


FIG. 3

FIG. 4

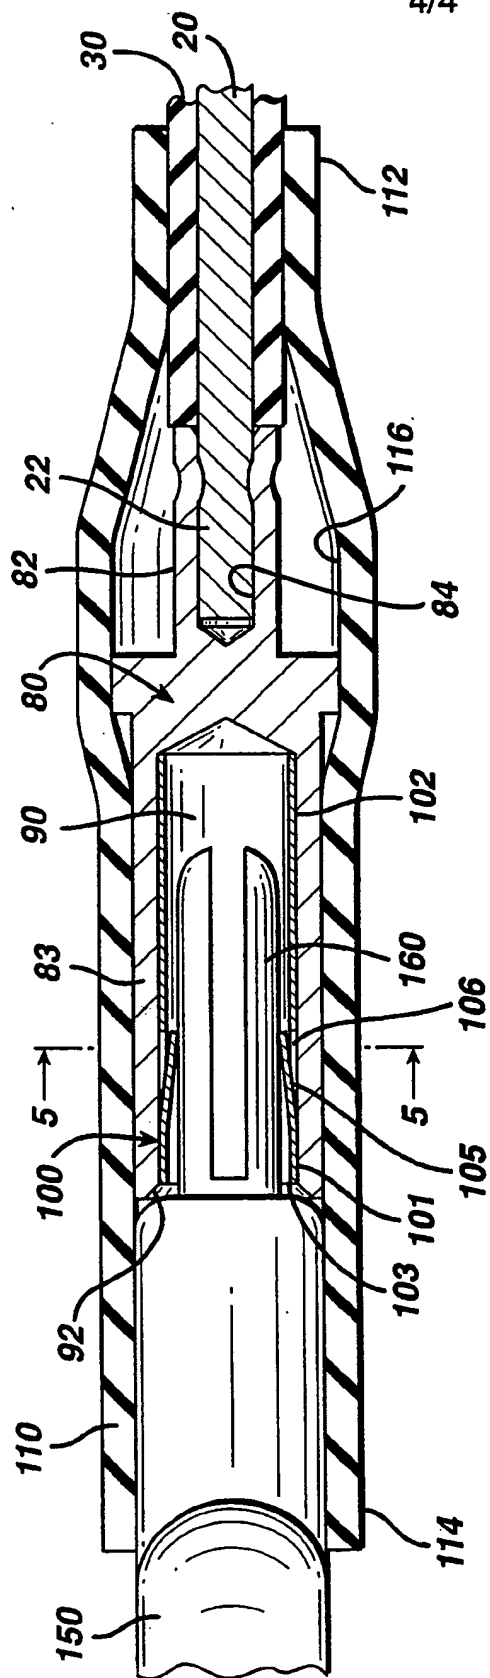


FIG. 6


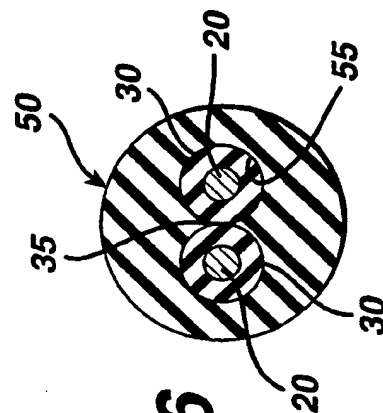


FIG. 5

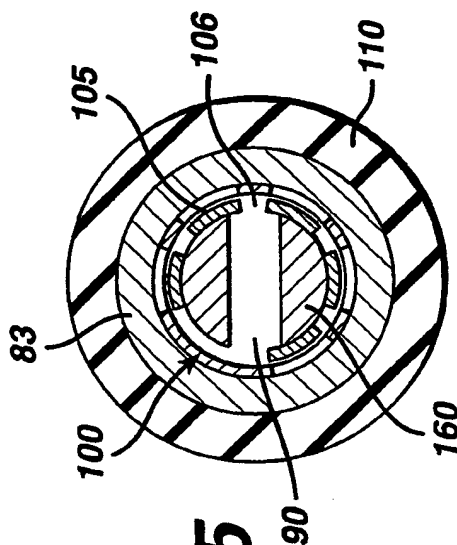

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/29209

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61B18/14		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 026 371 A (RYDELL MARK A ET AL) 25 June 1991 (1991-06-25) column 5, line 34 - line 68; figure 1	1,2,4,7
Y	----	6,8
Y	US 5 693 045 A (EGGERS PHILIP E) 2 December 1997 (1997-12-02) column 3, line 55-62; figure 2	6,8
A	US 5 472 443 A (CORDIS JACK C ET AL) 5 December 1995 (1995-12-05) column 5, line 66 - column 6, line 11; figures 1,4A	1,2,4,6
A	DE 32 20 940 A (MASLANKA HARALD) 8 December 1983 (1983-12-08) page 15, line 22-24,33-35; figure 4	1
<div style="display: flex; justify-content: space-between;"> <input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">23 February 2000</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">03/03/2000</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Rosenblatt, T</div>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/29209

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5026371 A	25-06-1991	NONE	
US 5693045 A	02-12-1997	AU 706501 B	17-06-1999
		AU 5987596 A	30-12-1996
		CA 2222148 A	19-12-1996
		EP 0836434 A	22-04-1998
		JP 11506676 T	15-06-1999
		WO 9639968 A	19-12-1996
US 5472443 A	05-12-1995	US 5633578 A	27-05-1997
		AU 672751 B	17-10-1996
		AU 2188392 A	12-01-1993
		AU 672753 B	17-10-1996
		AU 2199992 A	08-01-1993
		AU 656405 B	02-02-1995
		AU 2220092 A	12-01-1993
		CA 2110921 A	10-12-1992
		CA 2110922 A	23-12-1992
		CA 2110923 A	23-12-1992
		CH 688750 A	27-02-1998
		CH 686608 A	15-05-1996
		DE 69209146 D	25-04-1996
		DE 69209146 T	01-08-1996
		DE 69210683 D	20-06-1996
		DE 69210683 T	26-09-1996
		DE 69221942 D	09-10-1997
		DE 69221942 T	26-03-1998
		DK 518230 T	16-09-1996
		DK 517243 T	16-03-1998
		DK 517244 T	05-08-1996
		EP 0518230 A	16-12-1992
		EP 0517243 A	09-12-1992
		EP 0517244 A	09-12-1992
		ES 2087343 T	16-07-1996
		ES 2106798 T	16-11-1997
		ES 2084873 T	16-05-1996
		GR 3019387 T	30-06-1996
		GR 3019920 T	31-08-1996
		GR 3024620 T	31-12-1997
		IE 74395 B	30-07-1997
		IE 74396 B	30-07-1997
		IE 80440 B	15-07-1998
		JP 6511400 T	22-12-1994
		JP 7500514 T	19-01-1995
		JP 6511401 T	22-12-1994
		WO 9222256 A	23-12-1992
		WO 9221301 A	10-12-1992
		WO 9222257 A	23-12-1992
		US 5484436 A	16-01-1996
		US 5769849 A	23-06-1998
		US 5766170 A	16-06-1998
		US 5776128 A	07-07-1998
		US 5810808 A	22-09-1998
		US 5324289 A	28-06-1994
		US 5330471 A	19-07-1994
		US 5391166 A	21-02-1995
DE 3220940 A	08-12-1983	NONE	